

# INDASH by PANAVISE®

75137-310

Page 1 of 1

## MOUNTING LOCATION:

Right side of radio JR

## TOOLS REQUIRED:

Dash Tool, Hook Tool

10mm Socket Driver

Phillips Screwdriver

## HARDWARE INCLUDED:

(2)-O- 8/32" Acorn Nuts

S7-1946(75002) Mount Top 90 deg

## COMMUNICATIONS DEVICE MOUNT

### INSTALLATION INSTRUCTIONS

PART#: 75137-310

MFG: TOYOTA

MODELS & YEARS:

4 Runner 2010-2018

## \*\* ADVISEMENT \*\*

Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components.

STEP #1: Remove the right and left side knob covers by prying with Dash Tool on inside below climate control knob and insert 2nd Dash Tool into space between radio bezel and pull to release (5) clips. Repeat on other side bezel and set aside.

STEP #2: With Dash tool and Hook Tool pull out climate control to release (4) clips. Set it down to get at screws under radio.

STEP #3: With 10mm Socket Driver remove the (4) screws below radio. Pull radio from the bottom to release (6) total clips. (2) Bottom, (2) Middle, (2) Top. Carefully let hang down to get at side of dash.


STEP #4: Place the bottom piece of InDash by PanaVise on right side of dash cavity in slot (see picture as to how it is positioned in place). Install (3) A screws supplied. Slightly bend mount for best fit and allow the bezel to fit as best it can, back in place.

STEP #5: Install top piece of mount (75002) with (2) Acorn Nuts.

INSTALLATION IS NOW COMPLETE. ENJOY YOUR NEW INDASH by PANAVISE MOUNT.



Climate Control removed showing radio screws location

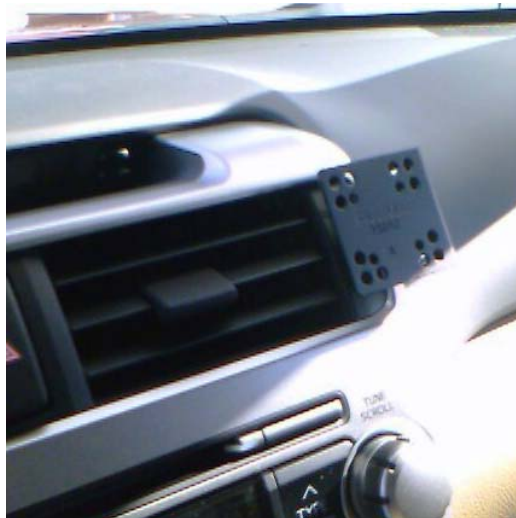

InDash installed showing location



Bottom piece mounting location



01-17-18